

# DAKOTA PREMIUM

DIRECTIONAL HOMOGENEOUS FLOORING SHEET



AEI / 1009  
Moonshine



AEI / 1002  
Mystic Beige




AEI / 1003  
Straw



AEI / 1035  
Sulfur Yellow




AEI / 1010  
Light Greige

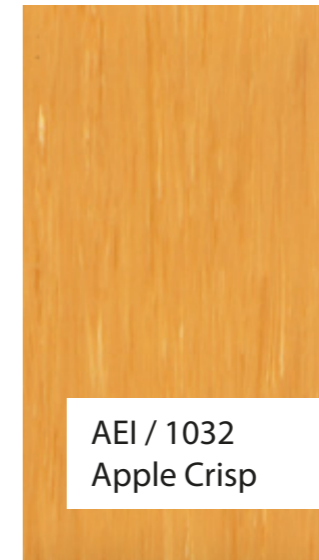


AEI / 1032  
Apple Crisp



AEI / 1055  
Pumpkin Cream

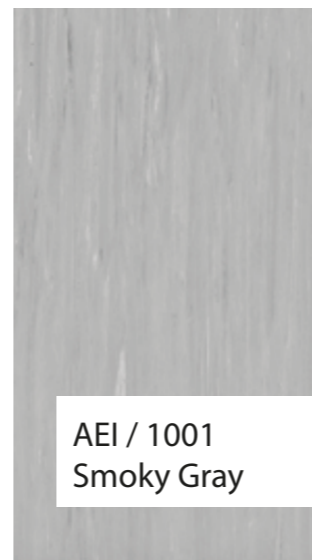

AEI / 1001  
Smoky Gray

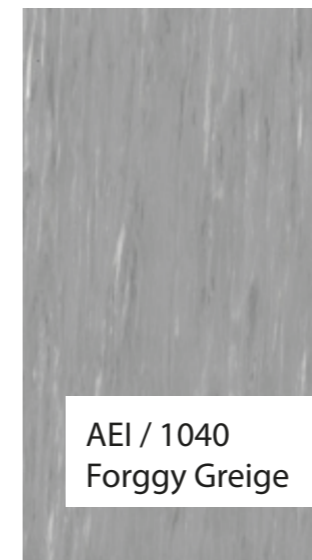

AEI / 1040  
Forgyy Greige



AEI / 1059  
Whale Gray



AEI / 1060  
Iron Mountain

# DAKOTA PREMIUM

DIRECTIONAL HOMOGENEOUS FLOORING SHEET



**2.0**  
EN 428  
Espesor Total  
(mm)

**P**  
EN 649  
Grupo de Abrasión  
3300g/m

**R9**  
DIN 51130  
Resistencia al  
deslizamiento

## DESCRIPCIÓN

Tamaño de rollo estándar		2m 20m
Tratamiento de superficies		PUR+
Resistencia al fuego	EN 13501	B <sub>s</sub> -s1
Propensión eléctrica estática	EN 1815	<2kV
Estabilidad dimensional	EN 434	≤ 0.4%
Resistencia a la luz	ISO 105-B02	≥ 6
Flexibilidad	EN 435	Sin fisuras
Punzonamiento	EN 433	≈ 0.04mm
Reducción de impacto de sonido	EN 717	Aprox. 4dB
Humos de toxicidad	BS 6853	<0.3%
Emisión de formaldehído	EN 14041	E1

### CALIDAD DEL AIRE INTERIOR

< 10 ug/m  
ISO 16000

### HEALTECH PERSONALIZABLE

Excelente  
ASTM G 21 - 13 & ASTM E 2180-07